

COMMANDER QUAD

FOR CHILDREN 3+
(WEIGHT LIMIT 88 LBS)

3+



12 Volt Quad Bike

Owners Manual with Assembly Instructions

90 Day Product & Battery Warranty

Be Safe and Always Wear Your Helmet

WARNING!

- To reduce the risk of injury, adult supervision is required. Never use in roadways, near motor vehicles, on or near steep inclines or steps, swimming pools or other bodies of water. Always wear shoes and a helmet.
- Never allow more than 1 rider.
- **TO PREVENT FIRE AND ELECTRIC SHOCK:**
 - Only use battery and charger provided and specified by manufacturer. Use of the wrong type of battery for charger could cause a fire or explosion.
 - **DO NOT** use the battery or charger for any other product. Overheating, fire or explosion could occur.
 - **NEVER** modify the electric circuit system. Alterations could cause a shock, fire or explosion.
 - **DO NOT** allow any type of liquid on the battery or its components. Explosive gases are created during charging. **DO NOT** charge near heat or flammable materials. Charge in a well ventilated area **ONLY**. Charge the battery in a dry area **ONLY**.
- **DO NOT** open the battery. Battery contains lead acid and other materials that are toxic and corrosive.
- **DO NOT** open the charger. Exposed wiring and circuitry inside case may cause electric shock.
- **ONLY ADULTS** may handle or charge the battery. **NEVER** allow child to handle or charge the battery. Battery is heavy and contains lead acid (electrolyte).
- **DO NOT** drop the battery. Permanent damage to the battery could occur or cause serious injury.
- Before charging the battery, check for wear or damage to the battery, charger and the connectors. **DO NOT** charge the battery if any damage to parts has occurred. Replace with manufacturer's parts **ONLY**.
- **DO NOT** allow the battery to drain completely, Recharge the battery after each use or once a month if not used regularly.
- **DO NOT** charge battery upside down.
- Always secure the battery with the bracket. Battery can fall out and injure a child if the vehicle tips over.
- **If a battery leak develops**, avoid contact with the leaking acid and place the damaged battery in a plastic bag. See information in "Disposal of Battery" for proper disposal.
- **If acid comes in contact with skin or eyes**, flush with cool water for at least 15 minutes and call a physician.
- **If acid is internally ingested**, give water, milk of magnesia or egg-white immediately. Never give emetics or induce vomiting. Call a physician.

If you have any question, please call the Redman and Associates service phone #1-877-901-8811 instead of returning to the retailer where purchased.





















Tools required

Philips head screwdriver



Pliers

Adjustable wrench

Component List

<div><div>Main body x1</div><div></div><div>1</div></div>	<div><div>Steering axle x1</div><div></div><div>2</div></div>	<div><div>12mm washers x 2 10mm washers x 6 5mm washers x 3</div><div></div><div>3</div></div>		
<div><div>Split pin x1</div><div></div><div>4</div></div>	<div><div>10mm lock nuts x 4 5mm lock nut x 1</div><div></div><div>5</div></div>	<div><div>4mm x 16mm screw x1 4mm x 12mm screws x8</div><div></div><div>6</div></div>	<div><div>Left rear fender x1</div><div></div><div>7</div></div>	
<div><div>Right rear fender x1</div><div></div><div>8</div></div>	<div><div>Front wheels x 2</div><div></div><div>9</div></div>	<div><div>Rear wheels x 2</div><div></div><div>10</div></div>	<div><div>Rear axle x1</div><div></div><div>11</div></div>	
<div><div>Wheels bushes x 6 Inside diameter 12mm outside diameter 16mm</div><div></div><div>12</div></div>	<div><div>Chrome wheel covers x 4</div><div></div><div>13</div></div>	<div><div>Chrome wheel caps x 4</div><div></div><div>14</div></div>	<div><div>Seat x1</div><div></div><div>15</div></div>	
<div><div>4mm x 16mm screw x 1</div><div></div><div>16</div></div>	<div><div>Front steering assembly x1</div><div></div><div>17</div></div>	<div><div>5mm x 35mm steering fixing bolt x1</div><div></div><div>18</div></div>	<div><div>Battery charger x1</div><div></div><div>19</div></div>	<div><div>Screw wrench x2</div><div></div><div>20</div></div>

If you have any question, please call the Redman and Associates service phone #1-877-901-8811 instead of returning to the retailer where purchased.

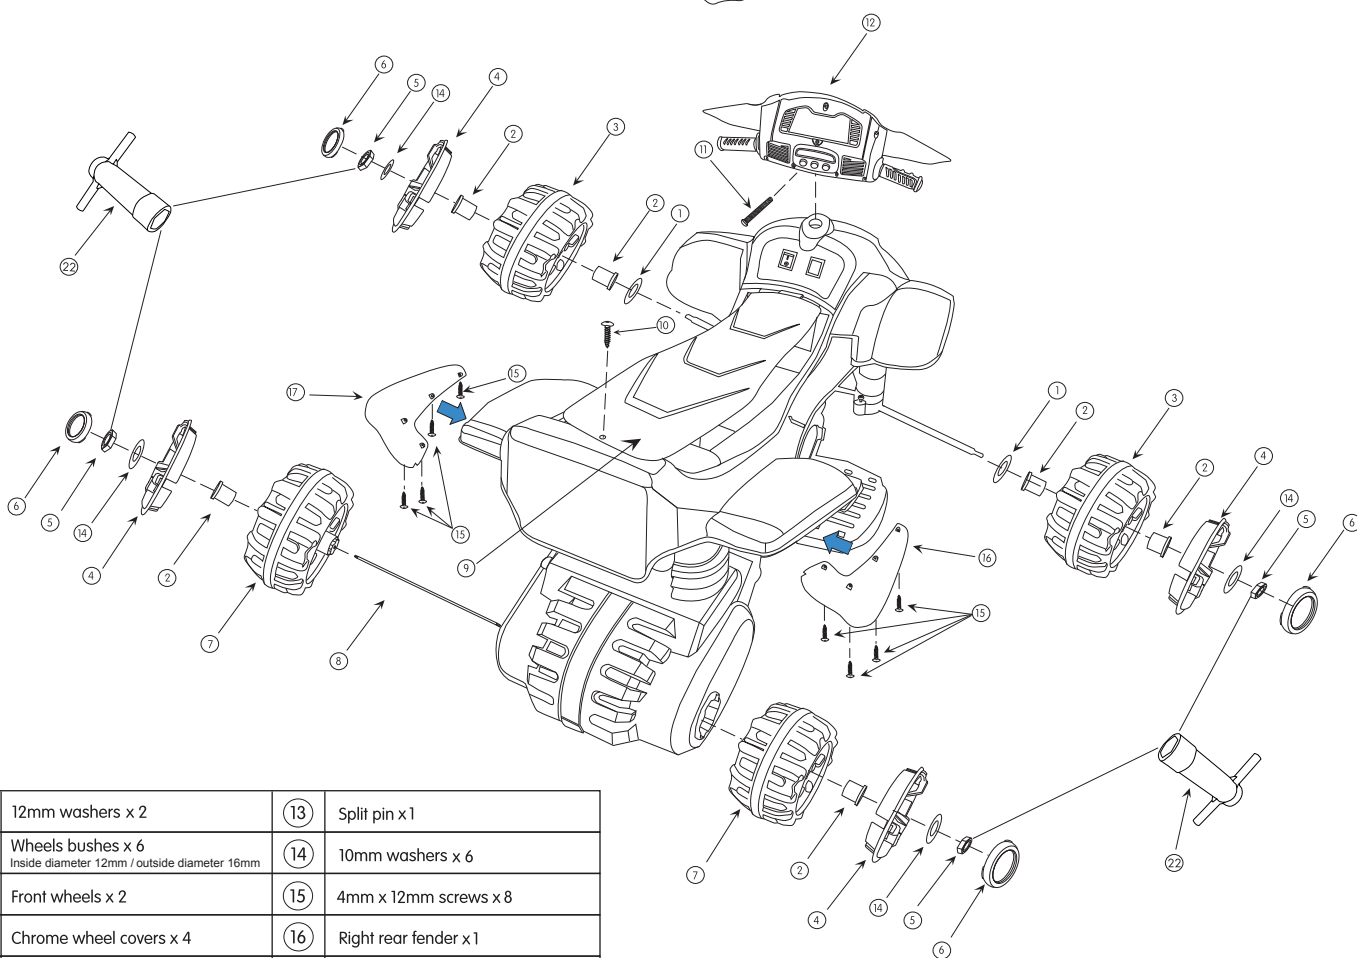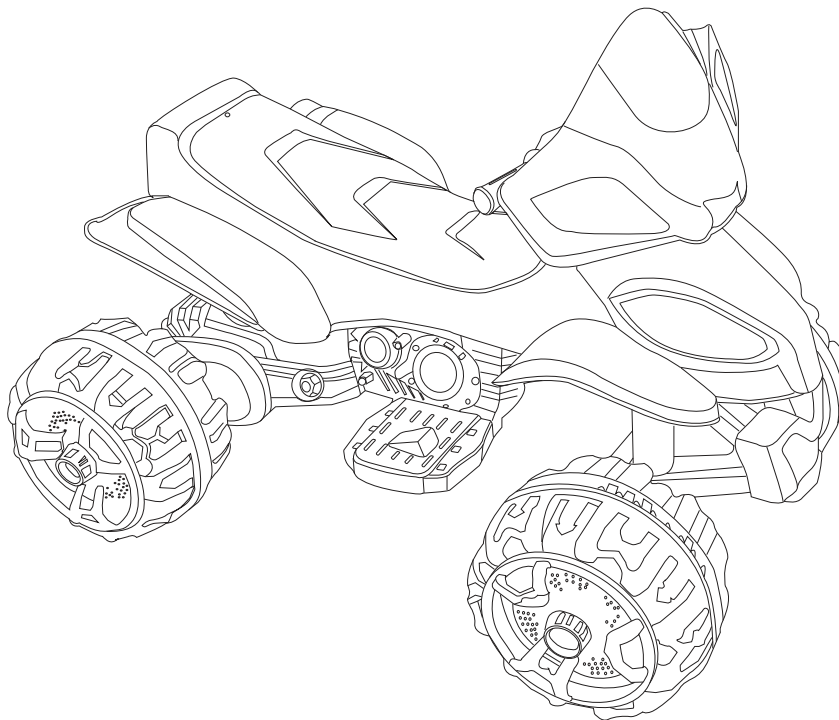



①	12mm washers x 2	⑬	Split pin x 1
②	Wheels bushes x 6 Inside diameter 12mm / outside diameter 16mm	⑭	10mm washers x 6
③	Front wheels x 2	⑮	4mm x 12mm screws x 8
④	Chrome wheel covers x 4	⑯	Right rear fender x 1
⑤	10mm lock nuts x 4	⑰	Left rear fender x 1
⑥	Chrome wheel caps x 4	⑱	5mm washer x 3 / 5mm x 35mm steering fixing bolt x 1
⑦	Rear wheels x 2	⑲	5mm lock nut x 1
⑧	Rear axle x 1	⑳	4mm x 16mm screw x 1
⑨	Seat x 1	㉑	Steering axle x 1
⑩	4mm x 16mm screw x 1	㉒	Screw wrench x 2
⑪	5mm x 25mm steering fixing bolt x 1		
⑫	Front steering assembly x 1		

IMPORTANT!


Before first time use, charge the battery for at least 10 hours. Never charge the battery longer than 15 hours.

If you have any question, please call the Redman and Associates service phone #1-877-901-8811 instead of returning to the retailer where purchased.


- Insert steering axle **21** through front wheel steering assembly as shown.
- Steering axle should be passed through front steering assembly and up through car body so that it protrudes through dashboard.
- Secure both front steering braces as shown.
- Lower end of steering axle should be inserted through steering assembly as shown with a washer either side of plate with hole. Split pin should then be inserted through hole drilled in steering axle and then either end of split pin bent outwards to ensure it cannot be removed.
- Left and right rear fenders should be screwed in from underside of rear mudguards using screws supplied.

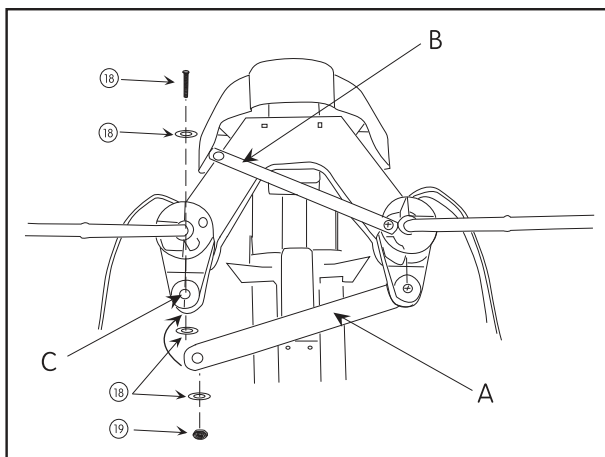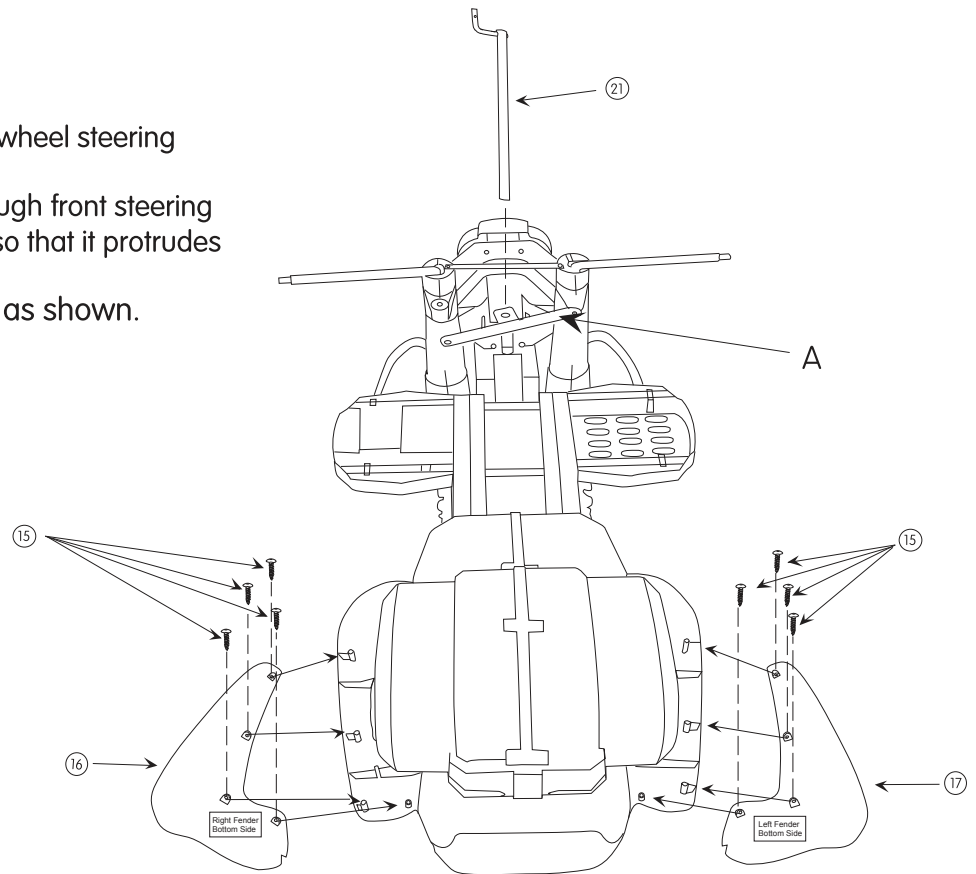

Secure front steering brace A as shown.

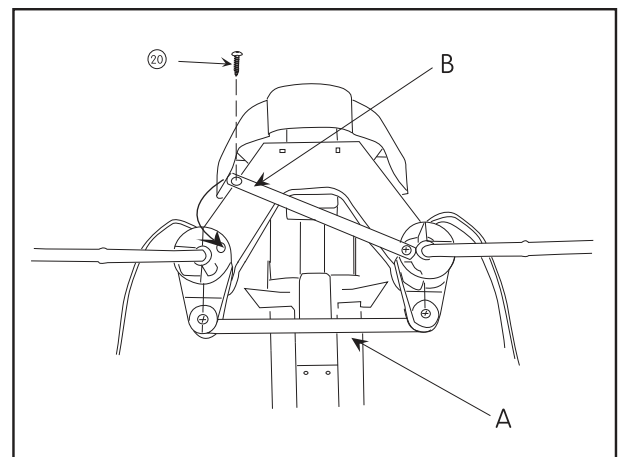


Secure front steering brace B as shown.

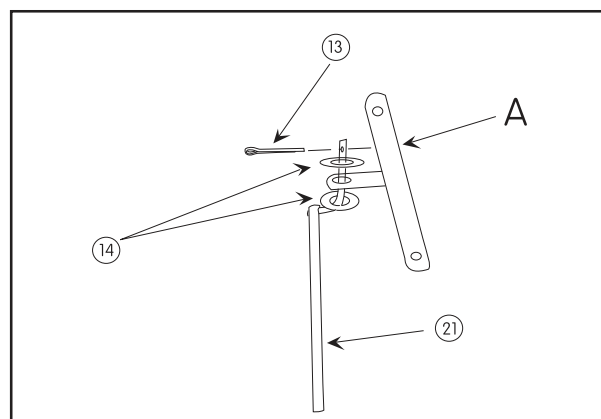


Secure steering rod to front steering brace A.

If you have any question, please call the Redman and Associates service phone #1-877-901-8811 instead of returning to the retailer where purchased.

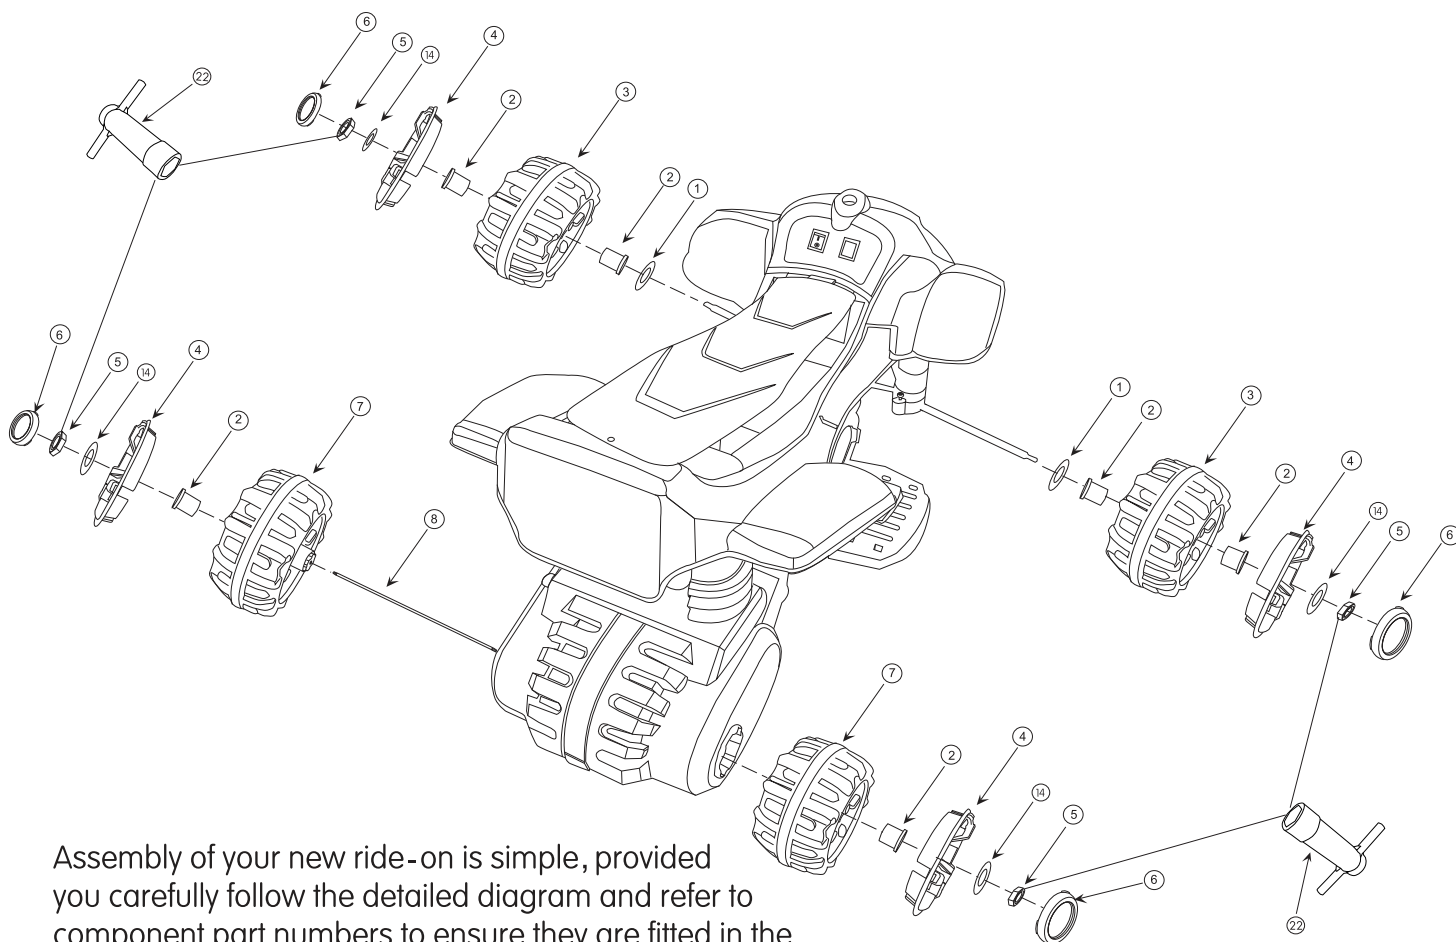


Assembly of your new ride-on is simple, provided you carefully follow the detailed diagram and refer to component part numbers to ensure they are fitted in the correct order as shown.


Your 12Volt battery is located directly under the seat. Please ensure that red wire is connected to red battery terminal and that black wire is connected to black battery terminal. These are clearly color coded. Do not connect opposite colors as short circuit will occur and permanent damage to your product will void your warranty. Battery should only be connected by an adult. Please ensure that seat is replaced and fastened with supplied screw after battery connection. Refer to page 6 for seat installation after battery connection.

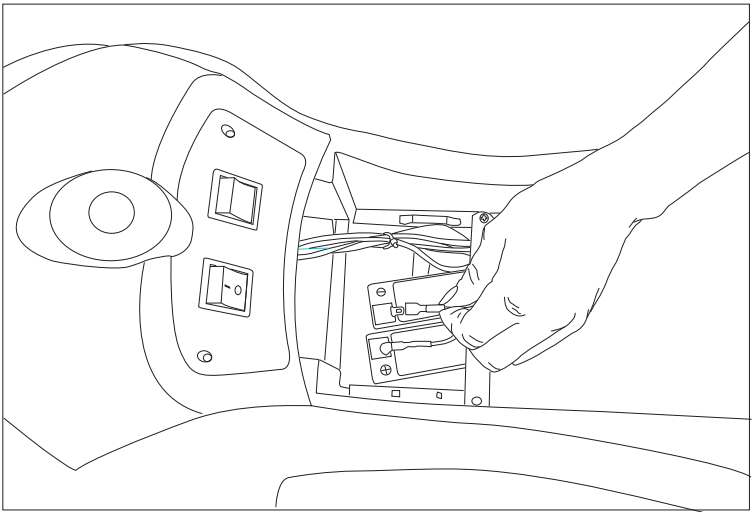

If you have any question, please call the Redman and Associates service phone #1-877-901-8811 instead of returning to the retailer where purchased.

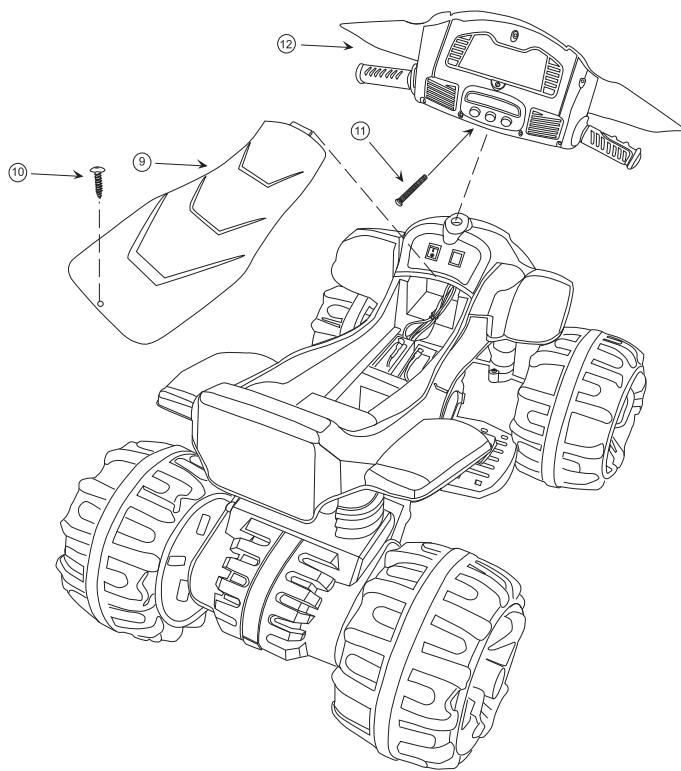


- Install seat after battery connection as shown. Refer to parts list for correct screw to be used.
- Place pre-assembled steering assembly over steering axle and align holes in both steering assembly and steering axle. Insert steering bolt 11 and fasten until tight. Move steering from side to side to ensure a proper fit.

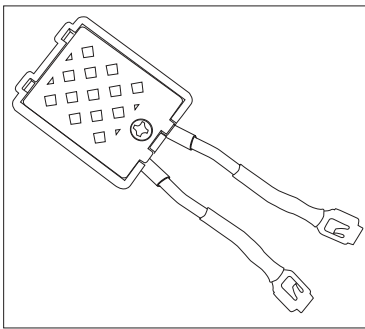

Thermal Fuse

Your Quad is fitted with a thermal overload fuse.

The function of this component is to protect the electrical circuit of your product. If the product is overloaded (refer to maximum user weight) or is used on a steep incline (not recommended) the thermal fuse will cut power supply to the motors and vehicle will stop. Thermal fuse will reset within 2 minutes and product function will resume as normal.

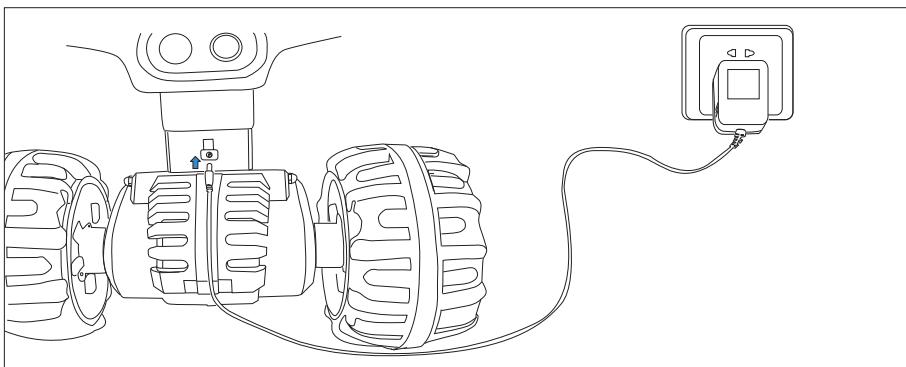

Charging your electric ride - on

Battery charging input socket is located at the rear of your Quad as shown in the image below. Plug charger output socket into input socket on your Quad as shown. Then plug AC adaptor / Charger into a standard 120V household power outlet. Battery should be charged for no longer than 15 hours first charge and each charge thereafter no less than 8-12 hours.

Never allow your battery to run completely flat and always place battery on charger if vehicle starts to show signs of slowing down or erratic motion.

Battery charger used with the toy is to be regularly examined for damage to the cord, plug, enclosure and other parts, and in the event of such damage it must not be used until that damage has been repaired.

If you have any question, please call the Redman and Associates service phone #1-877-901-8811 instead of returning to the retailer where purchased.

Product Specification

Suitable age grading	3+ yrs
Usage temperature range	0-40 degrees C
Maximum user weight	88 lbs
Speed	1.863-3.726/mph
Charger	Input AC 120V Output DC 12V 1000mA
Battery	6V 7Ah x 2
Charge time	8-12hrs
Battery life	Approx 300 charges

Battery safety information

Disposal Of Battery

Disposal of Battery



- Your sealed lead-acid battery must be recycled or disposed of in an environmentally sound manner.
- Do not dispose of your lead-acid battery in a fire. The battery may explode or leak.
- Do not dispose of a lead-acid battery in your regular, household trash. The incineration, land filling or mixing of sealed lead-acid batteries with household trash is prohibited by law.
- Return an exhausted battery to your local approved lead-acid battery recycler, such as a local seller of automotive batteries.
- Contact your local waste management officials for other information regarding the environmentally sound recycling and disposal of lead-acid batteries. If you live in the State of Florida or the State of Minnesota, it is prohibited by law for anyone to throw away lead-acid batteries in the municipal waste stream.

“California Proposition 65 Warning” WARNING:

This product's battery contains or emits chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

If you have any question, please call the Redman and Associates service phone #1-877-901-8811 instead of returning to the retailer where purchased.

Charging tips

1. Charging of battery should always be performed by an adult.
2. Never run battery flat as this will decrease battery life.
3. It is quite normal for battery and charger to become very warm during charging cycle. Never charge battery while still warm after use.
4. To ensure proper life span of your battery while vehicle is in storage, it is strongly advised to charge battery fully every 3 months.

Trouble Shooting Guide

Vehicle will not run at all.

Check all electrical connections and ensure there is no damage.

Vehicle is running slower than normal.

Stop use immediately and recharge battery.

Safety warnings

1. Battery should only be charged by an adult.
2. Children should always be supervised when riding.
3. Product should only be assembled by an adult.
4. Car should not be ridden at night, near or around swimming pools, steep slopes or near any public roads.
5. Always ensure that product is stationary before switching from forward to reverse.
6. To avoid suffocation, keep all bags away from children. Please dispose of all plastic bags immediately.
7. Vehicle should only be washed with a clean damp cloth.
8. Vehicle should never be used in wet weather.
9. It is advisable to protect vehicle from weather conditions when not in use.
Do not leave outside.
10. Never allow more than 1 rider at a time.
11. Always wear a helmet and protective clothing when riding.

If you have any question, please call the Redman and Associates service phone #1-877-901-8811 instead of returning to the retailer where purchased.

LIMITED WARRANTY

Your Electric Vehicle is warrantied by Redman and Associates, LLC. for 90 days from the date of original purchase against defects in materials or workmanship

This warranty covers normal use and the coverage is not extended if the unit was damaged by unreasonable use, neglect, accident, abuse/misuse, improper service or other causes not arising out of defects in material or workmanship. This warranty does not cover any liability claims for breach of warranty.

Please save your receipt from the original purchase in case of any warranty claims.

Should you need service or assistance with your vehicle during the warranty period,
Do not return the vehicle to the store. Please call our Customer Care Center at:

Phone: 1-877-901-8811

Fax: 1-479-271-6549

Email: customersupport@redmanandassociates.com

Website: www.redmanandassociates.com

9:00 am to 5:00 pm CST Monday through Friday.

Do not send any vehicles back to Redman and Associates, LLC without a pre-approved authorization number.

All returns must be sent pre-paid and customer is responsible for all other related shipping and handling charges.

This warranty gives you specific legal rights.



WARNING

Adult Assembling Requirement. To reduce the risk of injury, adult supervision is required. Never use in roadways, near cars, on or near steep inclines or steps, swimming pools or other bodies of water. Always wear shoes and never allow more than 1 rider. In unassembled state, contains potentially hazardous small parts, so please keep out of baby's reach.

Our products are suitable for the following standard:

- ☐ GB6675, GB19865
- ☒ ASTM-F963, CPSIA
- ☐ EN71 AND EN62115

If you have any question, please call the Redman and Associates service phone #1-877-901-8811 instead of returning to the retailer where purchased.

041612